

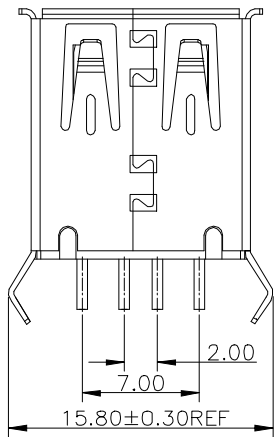

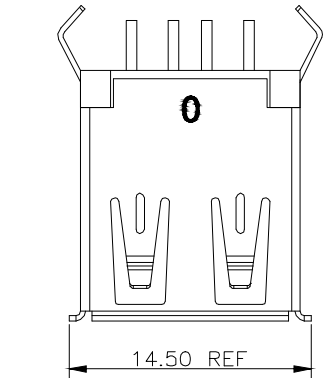


② **USB2.0 COMPLIANT**

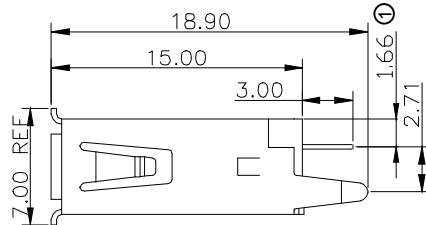

RoHS compliant

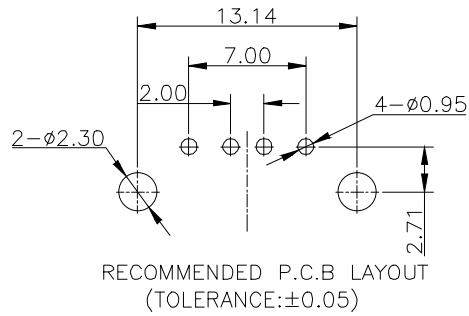

NOTES:

1.Material:

- 1.1 Housing: **PBT+30%GF UL94V-0, Color White**
- 1.2 Shell: **SPCC**
- 1.3 Contact :**Phosphor Bronze**

2. FINISH:

- 2.1 Contact Area: **Selective 30u"Au**
- Solder Area: Tin Plated**
- Under: Ni Plated**

3.MECHANICAL:

- 3.1 Mating Force:**3.57kgf Max.**
- 3.2 Unmating Force:**1.02kgf Min**
- 3.3 Durability:**1500 cycles Min**

4.ELECTRICAL:

- 4.1 Current Rating:**1.5A**
- 4.2 Dielectric Strength:**500V AC FOR 1 MINUTE**
- 4.3 Contact Resistance:**30mΩ Max**
- 4.4 Insulation Resistance:**1000 MΩ Min**

5.Operating temperature: -55°C TO +85°C

6.PACKIING: Tray

Scale	Free					Date	Name	Customer-No.
TOLERANCE						Drawn	22.04.2014	Winnie
.X	±0.30					Approved	30.12.2016	Winnie
.XX	±0.20							ASSMANN WSW-No.
.XXX	±0.10	②	Update	12.08.2019	Winnie			A-USB/2-A-TOP
DIM	TOL	①	Add the dimension	30.12.2016	Winnie			Drawing-No.
X.°	±5°							ASS 6346 CO
Angle	TOL	③	Drawn	22.04.2014	Winnie	Replace		SHEET
UNIT	mm	Id.	Modification	Date	Name			