

### KombiSIGN 40 / DesignLOOK

# KS40 Design BWM 24VAC/DC GN/YE/RD



Part No.:	639.301.01
Series:	KombiSIGN 40



MECHANICAL DATA			
Diameter	40 mm		
Materials	PC		
Dome colour	Clear		
Housing colour	Silver		
Protection category	IP66 IP69K		
Connection	Push-in terminal		
cross-sectional area minimum	0,25mm² / 24AWG		
cross-sectional area maximum	1,50mm <sup>2</sup> / 16AWG		
Cable entry	Through hole		
Cable entry maximum	d = 9  mm		
Tension relief	Not present		
Type of fixing	Base mounting Wall mounting		
Working temperature minimum	-30°C		
Working temperature maximum	+60°C		
Weight with packaging	210 g		
Product weight	129 g		

ELECTRICAL DATA		
Operating voltage	24V	
Operating voltage type	AC/DC	
Operating voltage frequency	50Hz	
Operating voltage tolerance	+/- 10%	
Rated operational voltage	24 VDC	
Rated operational current	40 mA	
Rated inrush current	500 mA	
Protection class	Protection class 3	
Pollution degree	3	
Request to external PSU	SELV/PELV	

OPTICAL DATA		
Light source	LED	
Light colour	Green Red Yellow	
Optical signal image	Blink Permanent	
Blink frequency (Hz)	1 Hz	
Service life optical	50,000 h maximum	

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



### KombiSIGN 40 / DesignLOOK

# KS40 Design BWM 24VAC/DC GN/YE/RD


APPROVAL DATA		
Conforms with CE	Yes	
WEEE	Yes	
Conforms with RED directive	No	
Conform with ATEX-directive	No	
Conforms with CCC	No	
Conforms with UL	No	
Conforms with FCC	No	
Conforms with IC	No	
EAC certificate available	Yes	
Conforms with AS-I	No	
ICAO Certification	No	
Conforms with GL	No	
Conforms with RoHS CN	No	
Conforms with VdS	No	

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



KombiSIGN 40 / DesignLOOK

# KS40 Design BWM 24VAC/DC GN/YE/RD

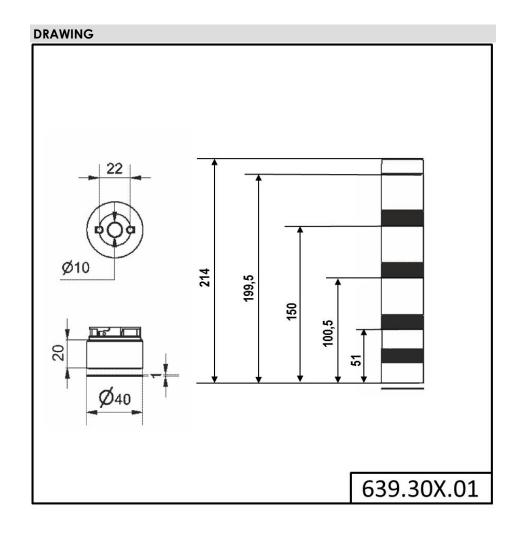

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.