




PROXSENSE® STANDARD TRACKPAD MODULE DATASHEET

ProxSense® Capacitive Trackpads with XY Coordinate, Gesture Recognition & Patented Snap / Push Button Detection

The ProxSense® series of capacitive trackpads offer best in class sensitivity, signal to noise ratio and power consumption. Automatic tuning for sense electrodes guarantees optimal operation over production and environmental changes.

Main Features

- > Trackpad with on chip XY coordinate calculation
- > 3072 x 2048 resolution
- > 170Hz report rate
- > Adjustable Sensitivity
- > Proximity wake up from low power
- > Automatic drift compensation
- > 1 & 2 Finger Gesture Detection
 - Swipe
 - Tap
 - Pinch / Zoom
 - Gesture with Hold
- > Fast I2C Interface
- > Optional Snap Overlay
- > Low Power, suitable for battery applications
- > Supply voltage: 1.65V to 3.6V
- > <40µA active sensing LP mode
- > I²C interface to BlueTooth SoC

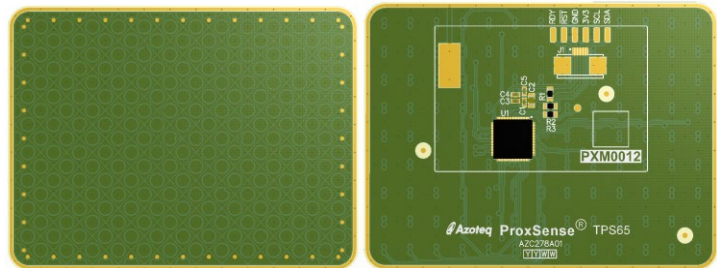

**RoHS2
Compliant**

Applications

- > Micro Projectors
- > Remote Controls
- > Printers & White Goods
- > Mechanical Push Button Replacement



Contents

| | |
|-------------------------------------|----|
| 1 HARDWARE DESCRIPTION | 3 |
| 2 TPS43 | 6 |
| 3 TPS65 | 7 |
| 4 GESTURES AND IMPLEMENTATION | 7 |
| 5 SPECIFICATIONS | 10 |
| 6 ORDERING INFORMATION | 11 |

DATASHEET REVISION HISTORY

| Version | Description | Date |
|---------|---|----------------|
| 1.00 | First Release | June 2015 |
| 1.01 | Updated Ordering Information | September 2015 |
| 1.02 | Fixed PXM0013 pictures, updated Contact Information | November 2020 |
| 1.03 | Template Update | March 2021 |



1 Hardware Description

The trackpad modules are constructed on RoHS2 and REACH compliant FR4 PCB material. The module PCBs are 1mm thick and have an ENIG finish with a hotbar footprint and FPC connector. The standard modules are not Halogen free.

Table 1-1: Summary of Trackpad Offerings

| Module Name | Shape | Size | Touch IC | Resolution |
|--------------|-------------|-------------|----------|-------------|
| <u>TPS43</u> | Rectangular | 43mm x 40mm | IQS572 | 2048 x 1792 |
| <u>TPS65</u> | Rectangular | 65mmx 49mm | IQS550 | 3072 x 2048 |

Table 1-2: Summary of Trackpad Overlay Offerings

| Module Name | Description | Stack-Up |
|---------------------------------------|--|----------|
| Adhesive | 3M Adhesive Supplied with Liner and Pull tab | <u>A</u> |
| Mylar Overlay | 0.2mm Mylar adhere to module with 3M double sided adhesive | <u>B</u> |
| 4mm Metal Dome for TPS43 only | Metal Dome sheet added on top of Isolation Film | <u>C</u> |
| Printed Rubber Overlay for TPS43 only | XXmm Black Overlay with Snap Keys | <u>D</u> |

1.1 PCB Specification

All 6 modules offered adhere to the following PCB specifications:

- > Material: 2-layer, FR4 PCB (non-HF material)
- > Conductor: 35µm Copper (1oz. Cu)
- > Finish: ENIG
- > Size: Module Specific
- > PCB Final Thickness = 1.0mm +/- 10%
- > Outline: Precision DIE-CUT Profile

1.2 Adhesive Specification

The modules offered are supplied with double sided adhesive applied on the trackpad for ease of integration. The adhesive is kept with the liner in place, with a pull tab for easy removal without tearing:

- > Type: 3M 468 200MP
- > Thickness = 0.13mm
- > Liner = Polycoated Kraft Paper
- > Liner w/ Pull-Tab (No glue on Pull-Tab)
- > Adhesive sized to fit entire tracking area (module specific)



1.3 Stack-Up A Thickness

The total thickness given in Figure 1.1 does not include the protective liner on the adhesive, as this liner needs to be removed when the module is assembled into the application. The highest part (thickest part of the module) of the assembly is located at the 0603 capacitor – C2. Please refer to the module STEP file for a 3D drawing indicating component positions.

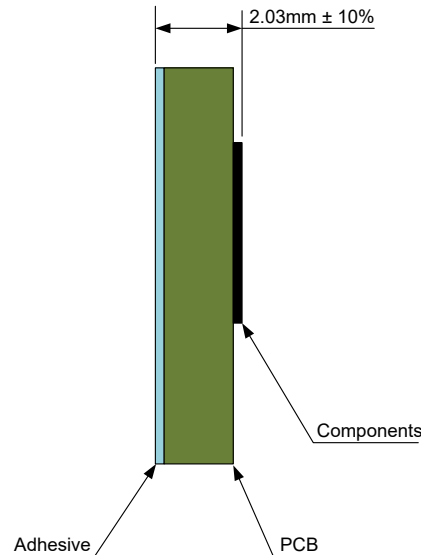


Figure 1-1: Stack-Up (A) - Thickness. PCB + 3M Double Sided Adhesive.

1.4 Stack-Up B Thickness

The total thickness given in Figure 1.2 includes the Mylar overlay, PCB and component heights. The highest part (thickest part of the module) of the assembly is located at the 0603 capacitor – C2. Please refer to the module STEP file for a 3D drawing indicating component positions.

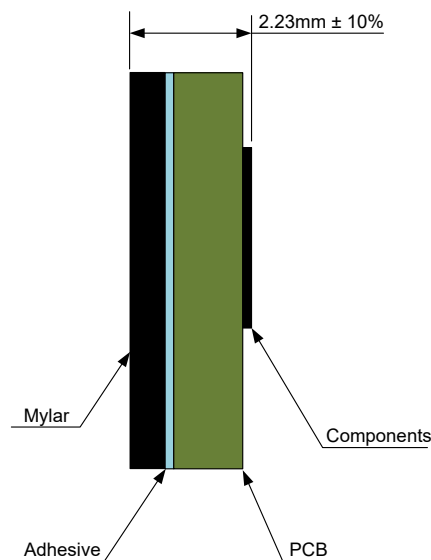


Figure 1-2: Maximum Module Thickness for Stack-Up B. PCB + 3M Double Sided Adhesive and Mylar Overlay



1.5 Stack-Up C Thickness

The total thickness given in Figure 1.3 indicates the height from the top of the metal domes, including PCB thickness and component heights. The highest part (thickest part of the module) of the assembly is located at the 0603 capacitor – C2.

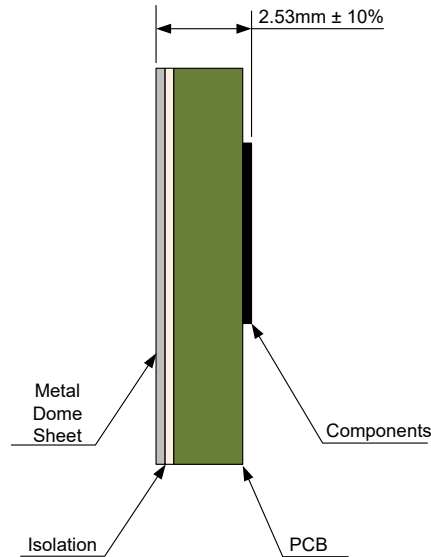


Figure 1-3: Maximum Module Thickness for Stack-Up C

1.6 Stack-Up D Thickness

The total thickness given in Figure 1.4 is the same as for stack-up C, with the addition of the 0.2mm printed rubber key mat. The highest part (thickest part of the module) of the assembly is located at the 0603 capacitor – C2.

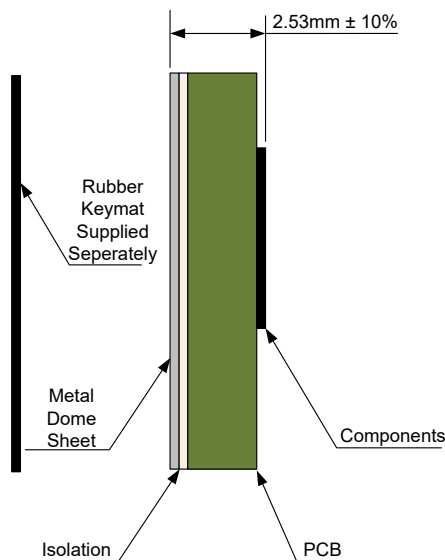


Figure 1-4: Maximum Module Thickness



1.7 Compatible Overlay Thickness

TPS65 and TPS43 support up to 3mm overlays, but is optimized for 1mm.

1.8 Finger Sizes

Table 1-3: Module Compatible Finger Sizes.

| Module | Min Finger | Min Finger Separation |
|--------|------------|-----------------------|
| TPS43 | 6.5 mm | 12 mm |
| TPS65 | 7.0 mm | 12.9 mm |

2 TPS43

The TPS43 is a 43mm x 40mm rectangular trackpad with rounded corners. A representation of the module can be found in Figure 2.1.

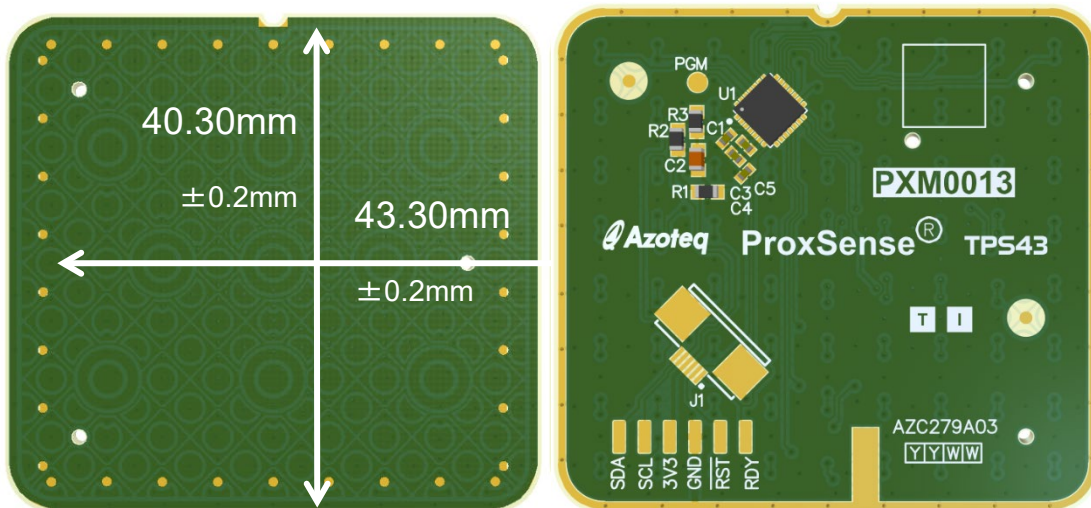


Figure 2-1: TPS43 – Module Representation

Table 2-1: FPC connector pin out for TPS43.

| J1 | Connection |
|----|------------|
| 1 | RDY |
| 2 | SDA |
| 3 | GND |
| 4 | VDDHI |
| 5 | SCL |
| 6 | NRST |



3 TPS65

The TPS65 is a 65mm x 49mm rectangular trackpad with rounded corners. A representation of the module is shown in Figure 3.1.

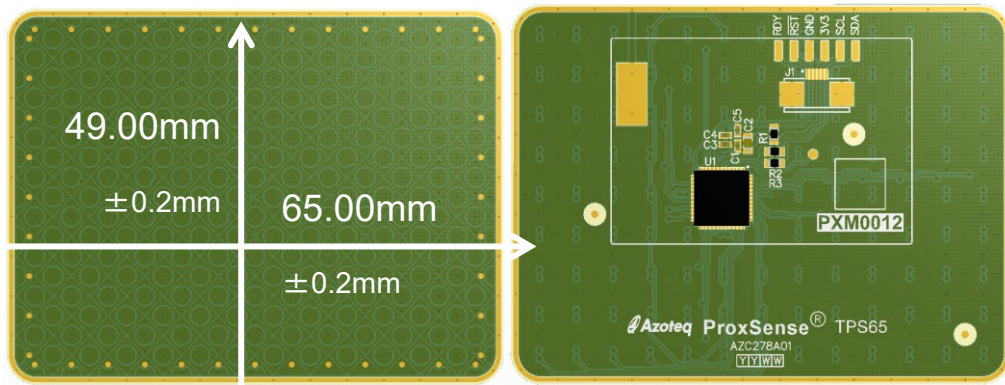


Figure 3-1: TPS65 – Module Representation

Table 3-1: FPC connector pin out for TPS65.

| J1 | Connection |
|----|------------|
| 1 | RDY |
| 2 | NRST |
| 3 | GND |
| 4 | VDDHI |
| 5 | SCL |
| 6 | SDA |

4 Gestures and Implementation

The TPS65 and TPS43 provides filtered XY coordinates for up to 5 fingers, which makes it ideal to be used for mouse pointer applications. It also supports gesture recognition, as shown below. For more information about the gestures, see the IQS5xx-B000 datasheet: http://www.azoteq.com/images/stories/pdf/iqs5xx-b000_trackpad_datasheet.pdf



4.1 Swipe Gestures

The trackpad modules can recognize 1 and 2 finger gestures. A valid gesture generates an interrupt event.

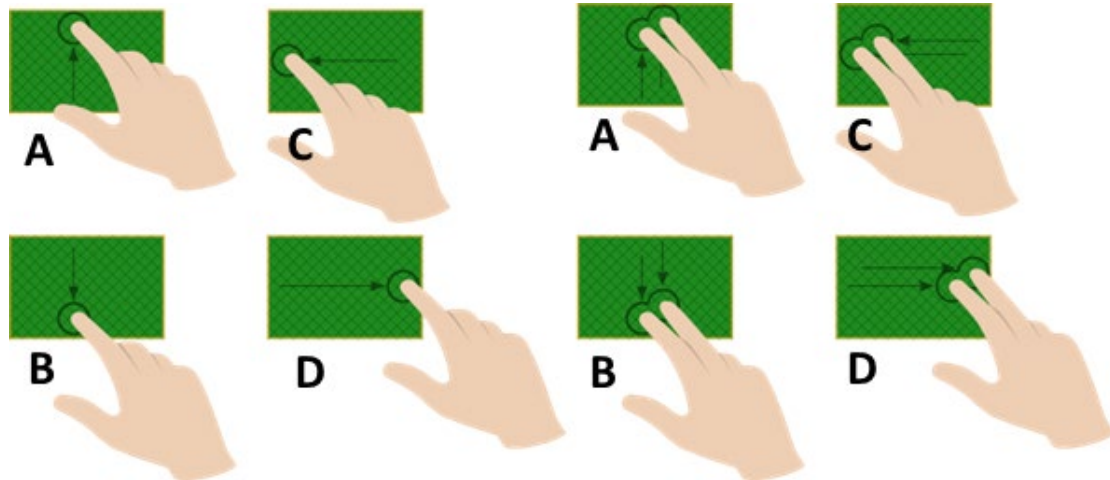


Figure4-1: Swipe Gestures

4.2 Tap Gesture

The trackpad module can recognize a tap gesture, from a single finger or two fingers, at any point on the trackpad surface. A valid tap generates an interrupt event.

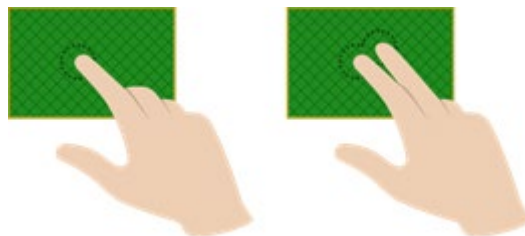


Figure 4-2: Illustration of Tap Gesture

4.3 Tap and Hold Gesture

The trackpad module can recognize a tap & hold gesture, from a single finger or two fingers, at any point on the trackpad surface. A valid tap & hold generates an interrupt event.

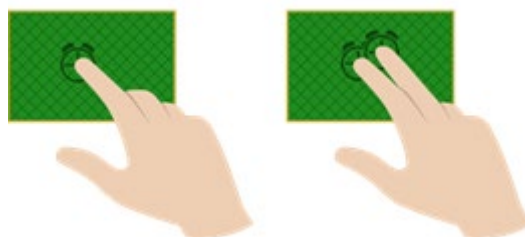


Figure 4-3: Tap & Hold Gesture



4.4 Swipe and Hold Gestures

The trackpad module recognizes four 1 and 2 finger swipe & hold gestures.

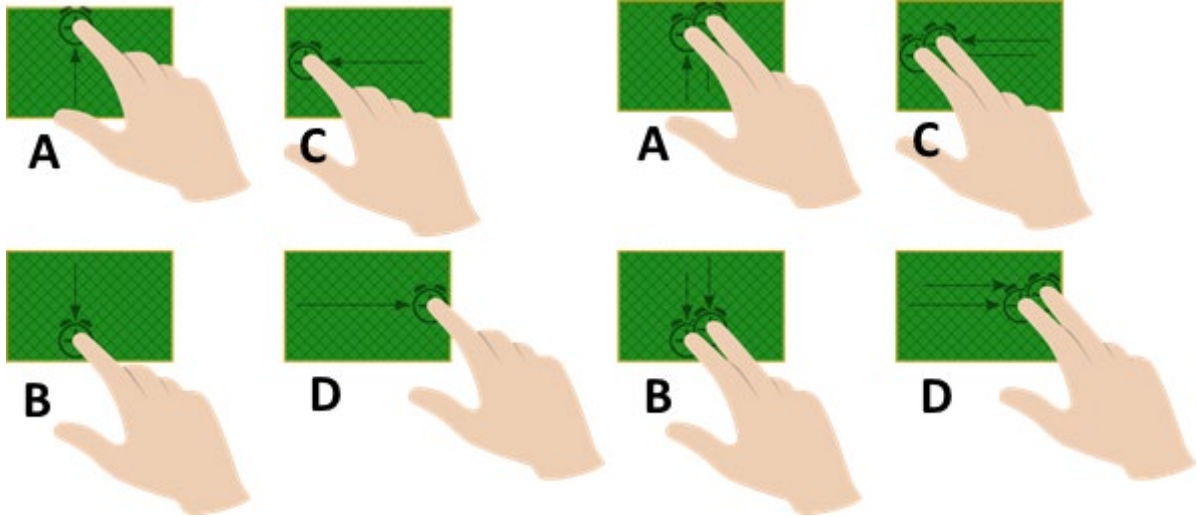


Figure 4-4: Swipe & Hold Gestures

4.5 Pinch & Zoom

A pinch gesture is reported when two touches move closer together, and a zoom gesture is reported when they move apart.

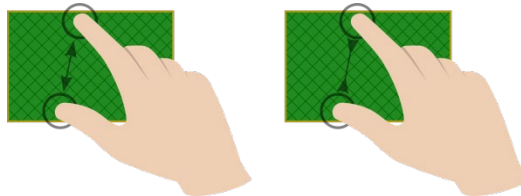


Figure 4-5: Illustration of Pinch and Zoom Gesture



5 Specifications

5.1 Absolute Maximum Specifications

The following absolute maximum parameters are specified for the device:

Exceeding these maximum specifications may cause damage to the device.

- > Operating temperature -40°C to 85°C
- > Supply Voltage (VDDHI – GND) 3.6V
- > Minimum power-on slope 100V/s
- > ESD protection ±2kV (Human body model)

5.2 Application Level Tests

According to the module design, with proper application system design implementation a 16kV IEC air discharge and 1Vp-p Conducted Immunity level should be possible to achieve.

5.3 Power Consumption

i. Trackpad Module General Operating Conditions

| DESCRIPTION | MIN | TYP | MAX | UNIT |
|-----------------------|------|------|-----|------|
| Supply voltage | 1.65 | 3.3V | 3.6 | V |
| Tracking Mode Current | - | TBD | | mA |
| Low Power Current | - | TBD | TBD | µA |


ii. Start-up and shut-down slope Characteristics

| DESCRIPTION | Conditions | PARAMETER | MIN | MAX | UNIT |
|------------------|---|------------------|------|------|------|
| Power On Reset | V _{DDHI} Slope ≥ 100V/s @25°C | V _{POR} | 1.44 | 1.65 | V |
| Power Down Reset | V _{DDHI} Slope ≥ 100V/s @25°C | V _{PDR} | 1.30 | 1.60 | V |



6 Ordering Information

Order quantities will be subject to MOQ of 5k pcs. Contact the official distributor for sample quantities. A list of the distributors can be found under the “Distributors” section of www.azoteq.com.

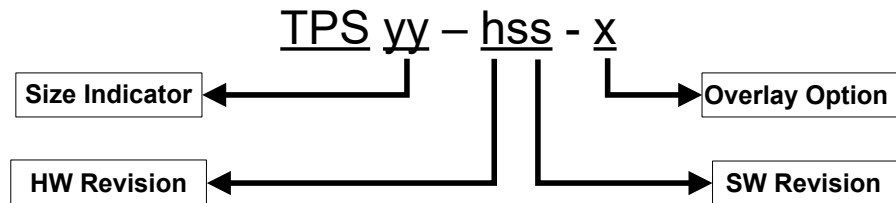

| | | | |
|---|-----|---|-------------------------------------|
| Trackpad Module | TPS | = | Trackpad |
| Size Indicator (yy) | 43 | = | 43mm |
| | 65 | = | 65mm |
| Hardware Revision (h) Connection | 1 | = | Standard Module With Hot Bar |
| | 2 | = | Standard Module with Ziff Connector |
| Software Revision (ss) | 01 | = | Standard Gestures |
| Overlay Options (x) | A | = | No overlay, Adhesive only |
| | B | = | 0.2mm Black Mylar |
| | C | = | Metal Dome Layer (4mm Domes) |
| | D | = | Metal Dome Layer with Rubber Mat |
| Overlay options C and D are only available for TPS43 | | | |


Note: For non-standard versions please contact Azoteq direct.



| | USA | Asia | South Africa |
|-------------------------|--|---|--|
| Physical Address | 11940 Jollyville Suite 120-S Austin TX 78750 USA | Room 501A, Block A, T-Share International Centre, Taoyuan Road, Nanshan District, Shenzhen, Guangdong, PRC | 1 Bergsig Avenue Paarl 7646 South Africa |
| Postal Address | 11940 Jollyville Suite 120-S Austin TX 78750 USA | Room 501A, Block A, T-Share International Centre, Taoyuan Road, Nanshan District, Shenzhen, Guangdong, PRC | PO Box 3534 Paarl 7620 South Africa |
| Tel | +1 512 538 1995 | +86 755 8303 5294 ext 808 | +27 21 863 0033 |
| Email | info@azoteq.com | info@azoteq.com | info@azoteq.com |

*Visit www.azoteq.com
for a list of distributors and worldwide representation.*

Patents as listed on www.azoteq.com/patents-trademarks/ may relate to the device or usage of the device.

Azoteq®, Crystal Driver , IQ Switch®, ProxSense®, ProxFusion®, LightSense™, SwipeSwitch™, and the  logo are trademarks of Azoteq.

The information in this Datasheet is believed to be accurate at the time of publication. Azoteq uses reasonable effort to maintain the information up-to-date and accurate, but does not warrant the accuracy, completeness or reliability of the information contained herein. All content and information are provided on an "as is" basis only, without any representations or warranties, express or implied, of any kind, including representations about the suitability of these products or information for any purpose. Azoteq disclaims all warranties and conditions with regard to these products and information, including but not limited to all implied warranties and conditions of merchantability, fitness for a particular purpose, title and non-infringement of any third party intellectual property rights. Azoteq assumes no liability for any damages or injury arising from any use of the information or the product or caused by, without limitation, failure of performance, error, omission, interruption, defect, delay in operation or transmission, even if Azoteq has been advised of the possibility of such damages. The applications mentioned herein are used solely for the purpose of illustration and Azoteq makes no warranty or representation that such applications will be suitable without further modification, nor recommends the use of its products for application that may present a risk to human life due to malfunction or otherwise. Azoteq products are not authorized for use as critical components in life support devices or systems. No licenses to patents are granted, implicitly, express or implied, by estoppel or otherwise, under any intellectual property rights. In the event that any of the abovementioned limitations or exclusions does not apply, it is agreed that Azoteq's total liability for all losses, damages and causes of action (in contract, tort (including without limitation, negligence) or otherwise) will not exceed the amount already paid by the customer for the products. Azoteq reserves the right to alter its products, to make corrections, deletions, modifications, enhancements, improvements and other changes to the content and information, its products, programs and services at any time or to move or discontinue any contents, products, programs or services without prior notification. For the most up-to-date information and binding Terms and Conditions please refer to www.azoteq.com.