Completely pre-assembled Signal Towers / KOMPAKT 37 K37 plug EM 24VAC/DC YE/RD



i

Part No.:	698.230.75		
Series:	Kompakt 37		
MECHAN	ICAL DATA		
Height			141 mm
Diameter			38 mm
Materials			PC
Dome colour			Red
			Yellow
Housing colour			Black
Protection category			IP65
Connection			M12 plug 5-pole
Cable entry			Membrane grommet
Cable entry minimum			d = 1 mm
Cable entry maximum			d = 9 mm
Tension relief			Pull-out protection
Type of fixing			Built-in mounting
Working temperature minimum		ninimum	-20°C
Working temperature maximum		naximum	+50°C
Weight with packaging			112 g
Product weight			73 g
ELECTRIC	AL DATA		
Operating	Operating voltage		24V
Operating voltage type		;	AC/DC
Operating voltage frequency		uency	50Hz
Operating voltage tolerance		ance	+/- 10%
Rated operational voltage		ge	24 VDC
Rated operational current		ent	60 mA
Rated inrush current			500 mA
Protection class			Protection class 2
Pollution degree			3 In the connection area: 2
OPTICAL	DATA		
Light source			LED
Light colour			Red Yellow
Optical signal image			Permanent
Service life optical			50,000 h maximum
APPROVA	L DATA		
APPROVA Conforms			Yes

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

i


Completely pre-assembled Signal Towers / KOMPAKT 37 K37 plug EM 24VAC/DC YE/RD

Conforms with RED directive	No
Conform with ATEX-directive	No
Conforms with CCC	No
Conforms with UL	CULus
UL Type Rating	Туре 12 Туре 4Х
Conforms with FCC	No
Conforms with IC	No
EAC certificate available	Yes
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)
Conforms with AS-I	No
ICAO Certification	No
Conforms with GL	No
Conforms with RoHS CN	No
Conforms with VdS	No

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

i

Completely pre-assembled Signal Towers / KOMPAKT 37 K37 plug EM 24VAC/DC YE/RD

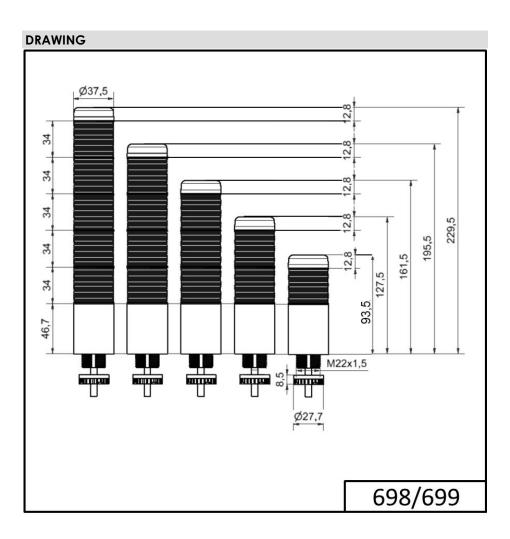

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.