


6748.2

EG-ZMA/24 VACDC 0,1-1s

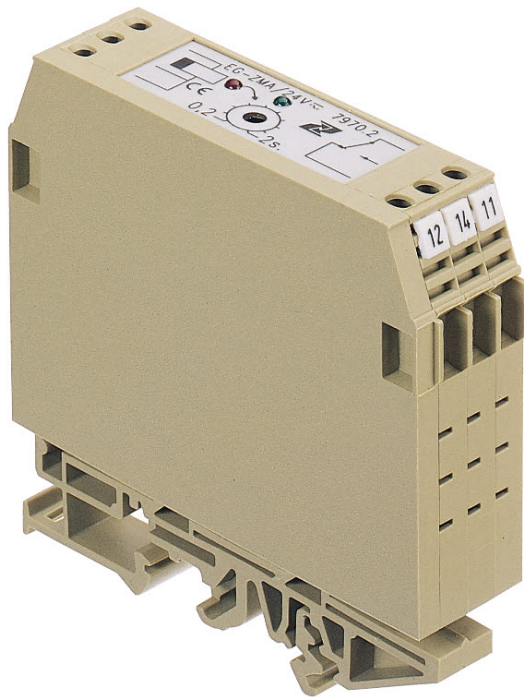

Drop-out delay timing relay, time range: 0.1 s to 1 s, Screw connection, Mounting type: Mounting rail TS 35, 1 CO contact, Supply voltage: 24 VAC/DC

## Business data

Packaging unit	1
Quantity unit	PC
Weight per piece (not including packaging)	72.6 g
Weight per piece (including packaging)	82.89 g
Unit of weight	G
Customs number	85364900
Country of origin	NL
Product description	Timing relay

6748.2

EG-ZMA/24 VACDC 0,1-1s

---

## Technical data

---

### Dimensions

---

Length	78 mm
Width	22.5 mm
Height TS 35 / 7.5 with BA	84 mm

---

### Ratings

---

Overvoltage category	III
Contamination degree	2
Power supply AC/DC	24 V

---

### Connection data

---

Connection principle	Screw connection
Wire cross-section single core (rigid), min.	0.2 mm <sup>2</sup>
Wire cross-section single-core (rigid), max.	2.5 mm <sup>2</sup>
Wire cross-section stranded, min.	0.2 mm <sup>2</sup>
Wire cross-section stranded, max.	2.5 mm <sup>2</sup>
Wire cross-section stranded with wire-end ferrules, min.	0.2 mm <sup>2</sup>
Wire cross-section stranded with wire-end ferrules, max.	2.5 mm <sup>2</sup>
Stripping length	7 mm
Relay contact	1 CO contact

---

### Materials

---

Working temperature, max.	50 °C
---------------------------	-------

---

### Further technical data

---

Protection class	IP20
Status display	✓

---

### Environmental Product Compliance

---

REACH Conform	Yes, yes
REACH Reference date	2021-07-08
REACH Candidate Substance Note	No
RoHS Conform	Yes, yes

---

6748.2

EG-ZMA/24 VACDC 0,1-1s

---

## Accessories

---