


## Inline terminal - IB IL 24 DO 4/EF-ECO - 2702825

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Inline ECO, Digital output terminal, Digital outputs: 4, 24 V DC, 500 mA, connection technology: 3-conductor, transmission speed in the local bus: 500 kbps, degree of protection: IP20, including Inline connector

### Product Description

The terminal is designed for use within an Inline station. It is used to output digital signals.

Inline ECO terminals are approved for the temperature range from 0°C to +55°C. The electronics base and Inline connector are supplied as standard.

### Your advantages

- Approved for use in a safety-related segment circuit
- 4 digital outputs
- Connection of actuators in 2- and 3-conductor technology
- Nominal current per output: 500 mA
- Total current of the terminal: 2 A
- Short-circuit and overload-protected outputs
- Diagnostic and status indicators



### Key Commercial Data

|              |               |
|--------------|---------------|
| Packing unit | 1 pc          |
| GTIN         |               |
| GTIN         | 4055626381473 |

### Technical data

#### Note

|                         |   |
|-------------------------|---|
| Utilization restriction | EMC: class A product, see manufacturer's declaration in the download area |
|-------------------------|---|

#### Dimensions

|        |          |
|--------|----------|
| Width  | 12.2 mm  |
| Height | 119.8 mm |

# Inline terminal - IB IL 24 DO 4/EF-ECO - 2702825

## Technical data

### Dimensions

|       |         |
|-------|---------|
| Depth | 71.5 mm |
|-------|---------|

### Ambient conditions

|  |   |
|--|---|
| Ambient temperature (operation)          | 0 °C ... 55 °C                                    |
| Ambient temperature (storage/transport)  | -25 °C ... 85 °C                                  |
| Permissible humidity (operation)         | 10 % ... 95 % (according to DIN EN 61131-2)       |
| Permissible humidity (storage/transport) | 10 % ... 95 % (according to DIN EN 61131-2)       |
| Air pressure (operation)                 | 70 kPa ... 106 kPa (up to 3000 m above sea level) |
| Air pressure (storage/transport)         | 70 kPa ... 106 kPa (up to 3000 m above sea level) |
| Degree of protection                     | IP20  |

### Connection data

|                                       |                        |
|---------------------------------------|------------------------|
| Designation                           | Inline connector       |
| Connection method                     | Spring-cage connection |
| Conductor cross section solid min.    | 0.08 mm <sup>2</sup>   |
| Conductor cross section solid max.    | 1.5 mm <sup>2</sup>    |
| Conductor cross section flexible min. | 0.08 mm <sup>2</sup>   |
| Conductor cross section flexible max. | 1.5 mm <sup>2</sup>    |
| Conductor cross section AWG min.      | 28                     |
| Conductor cross section AWG max.      | 16                     |
| Stripping length                      | 8 mm                   |

### General

|                               |  |
|-------------------------------|--|
| Mounting type                 | DIN rail   |
| Color                         | green  |
| Net weight                    | 83.85 g  |
| Note on weight specifications | with connector   |
| Diagnostics messages          | Short-circuit or overload of the digital outputs Error message in the diagnostic code (bus) and display (2 Hz) via the LED (D) on the module |

### Interfaces

|                    |                    |
|--------------------|--------------------|
| Designation        | Inline local bus   |
| Number             | 2                  |
| Connection method  | Inline data jumper |
| Transmission speed | 500 kbps           |

### Inline potentials

|                      |  |
|----------------------|--|
| Designation          | Communications power (U <sub>L</sub> )                             |
| Supply voltage       | 7.5 V DC (via voltage jumper)                                      |
| Current consumption  | max. 44 mA   |
| Power consumption    | max. 0.33 W  |
| Designation          | Segment circuit supply (U <sub>S</sub> )                           |
| Supply voltage       | 24 V DC (via voltage jumper)                                       |
| Supply voltage range | 19.2 V DC ... 30 V DC (including all tolerances, including ripple) |

# Inline terminal - IB IL 24 DO 4/EF-ECO - 2702825

## Technical data

### Inline potentials

|                     |          |
|---------------------|----------|
| Current consumption | max. 2 A |
|---------------------|----------|

### Digital outputs

|  |   |
|--|---|
| Output name                                | Digital outputs   |
| Number of outputs                          | 4   |
| Connection method                          | Spring-cage connection  |
| Connection technology                      | 3-conductor   |
| Protective circuit                         | Overload protection, short-circuit protection of outputs Zener diode in output chip |
| Output voltage                             | 24 V DC ( $U_s - 1$ V)  |
| Maximum inrush current                     | max. 1.5 A (for 20 ms)  |
| Nominal output voltage                     | 24 V DC   |
| Output current per channel                 | 500 mA  |
| Output current of the device               | 2 A   |
| Nominal load, inductive                    | 12 VA (1.2 H, 50 $\Omega$ )   |
| Nominal load, lamp                         | 12 W  |
| Nominal load, ohmic                        | 12 W (48 $\Omega$ )   |
| Output voltage when switched off           | max. 2 V  |
| Output current when switched off           | max. 300 $\mu$ A  |
| Behavior with overload                     | Auto restart  |
| Behavior with inductive overload           | Output can be destroyed   |
| Reverse voltage resistance to short pulses | Reverse voltage proof   |

### Electrical isolation

|              |   |
|--------------|---|
| Test section | 5 V supply, incoming remote bus/7.5 V supply (bus logics) 500 V AC 50 Hz 1 min. |
|              | 5 V supply, outgoing remote bus/7.5 V supply (bus logics) 500 V AC 50 Hz 1 min. |
|              | 7.5 V supply (bus logics)/24 V supply (I/O) 500 V AC 50 Hz 1 min.               |
|              | 24 V supply (I/O) / functional ground 500 V AC 50 Hz 1 min.                     |

### Standards and Regulations

|                  |                                       |
|------------------|---------------------------------------|
| Protection class | III (IEC 61140, EN 61140, VDE 0140-1) |
|------------------|---------------------------------------|


### Environmental Product Compliance

|            |   |
|------------|---|
| REACH SVHC | Lead 7439-92-1  |
| China RoHS | Environmentally Friendly Use Period = 50 years  |
|            | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |


## Drawings

# Inline terminal - IB IL 24 DO 4/EF-ECO - 2702825

Block diagram

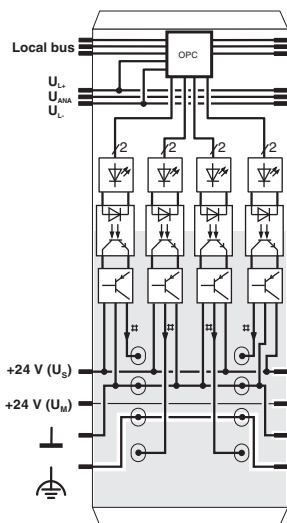


Dimensional drawing

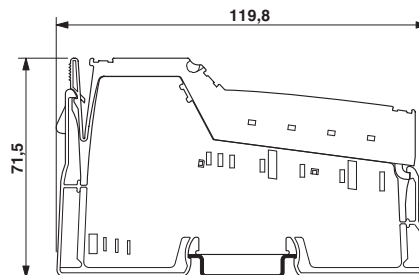

Internal wiring of the terminal points

Connection diagram

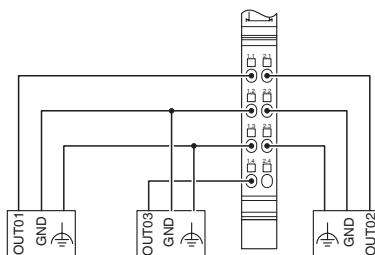

## Classifications

### eCl@ss

|               |          |
|---------------|----------|
| eCl@ss 10.0.1 | 27242604 |
| eCl@ss 11.0   | 27242604 |
| eCl@ss 5.1    | 27242604 |
| eCl@ss 6.0    | 27242600 |
| eCl@ss 7.0    | 27242604 |
| eCl@ss 9.0    | 27242604 |

### ETIM

|          |          |
|----------|----------|
| ETIM 6.0 | EC001599 |
| ETIM 7.0 | EC001599 |

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 18.0 | 32151602 |
| UNSPSC 19.0 | 32151602 |
| UNSPSC 20.0 | 32151602 |

# Inline terminal - IB IL 24 DO 4/EF-ECO - 2702825

## Classifications

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 32151602 |
|-------------|----------|

## Approvals

### Approvals

### Approvals

UL Listed / cUL Listed / cULus Listed

### Ex Approvals

## Approval details

|           |  |   |               |
|-----------|--|---|---------------|
| UL Listed |  | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | FILE E 140324 |
|-----------|--|---|---------------|

|            |  |   |               |
|------------|--|---|---------------|
| cUL Listed |  | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | FILE E 140324 |
|------------|--|---|---------------|

|              |  |  |  |
|--------------|--|--|--|
| cULus Listed |  |  |  |
|--------------|--|--|--|

## Accessories

### Accessories

### Labeling panel

Labeling field - IB IL FIELD 2 - 2727501

Labeling field, width: 12.2 mm



### Plug

## Inline terminal - IB IL 24 DO 4/EF-ECO - 2702825

### Accessories

Inline connector - IB IL SCN-8 - 2726337

Connector, for digital 1, 2 or 8-channel Inline terminals



---

### Terminal marking

Insert strip - ESL 62X10 - 0809492

Insert strip, Sheet, white, unlabeled, can be labeled with: Office printing systems: Laser printer, mounting type: insert, lettering field size: 62 x 10 mm, Number of individual labels: 72



---

Phoenix Contact 2021 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>