## Completely pre-assembled Signal Towers / KOMPAKT 37 K37cl sr cable EM Pulse tone 24VAC/DC GN



i

Part No.:	699.310.75	
Series:	Kompakt 37	
MECHAN	ICAL DATA	
Height		175 mm
Diameter		38 mm
Materials		PC
Dome colour		Clear
Housing colour		Silver
Protection category		IP65
Connection		Cable
cross-sectional area maximum		0,34mm² / 22AWG
Cable entry		Membrane grommet
Cable entry minimum		d = 1 mm
Cable entry maximum		d = 9 mm
Cable length		2000 mm
Tension relief		Pull-out protection
Type of fixing		Built-in mounting
Working temperature minimum		-20°C
Working temperature maximum		+50°C
Weight with packaging		216 g
Product weight		180 g
ELECTRIC	AL DATA	
Operating voltage		24V
Operating voltage type		AC/DC
Operating voltage frequency		50Hz
Operating voltage tolerance		+/- 10%
Rated operational voltage		24 VDC
Rated operational current		125 mA
Rated inrush current		500 mA
Protection class		Protection class 2
Pollution degree		3 In the connection area: 2
OPTICAL	DATA	
Light source		LED
Light colour		Green Red Yellow
Optical signal image		Permanent
Service life optical		50,000 h maximum
ACUSTIC	AL DATA	

## ACUSTICAL DATA

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

i




## Completely pre-assembled Signal Towers / KOMPAKT 37 K37cl sr cable EM Pulse tone 24VAC/DC GN

85,0 dB (A)
Pulse tone
2900 Hz
5,000 h minimum
Yes
Yes
No
No
No
cULus
Type 12 Type 4X
No
No
Yes
Yes (WERMA (UK) Ltd.)
No

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

i

Completely pre-assembled Signal Towers / KOMPAKT 37 K37cl sr cable EM Pulse tone 24VAC/DC GN

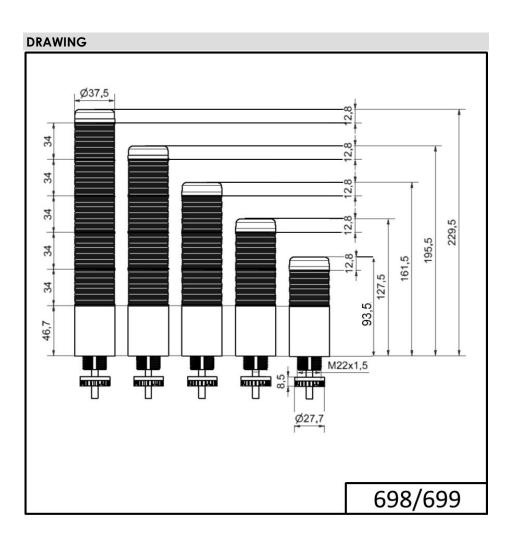

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.