Completely pre-assembled Signal Towers / KOMPAKT 37 K37cl sr cable EM Pulse tone 24VAC/DC GN



i

Part No.:	699.320.75	
Series:	Kompakt 37	
MECHAN	IICAL DATA	
Height		141 mm
Diameter		38 mm
Materials		PC
Dome colour		Clear
Housing colour		Black
Protection category		IP65
Connection		Cable
cross-sectional area maximum		0,34mm² / 22AWG
Cable entry		Membrane grommet
Cable entry minimum		d = 1 mm
Cable entry maximum		d = 9 mm
Cable length		2000 mm
Tension relief		Pull-out protection
Type of fixing		Built-in mounting
Working temperature minimum		-20°C
Working temperature maximum		+50°C
Weight with packaging		182 g
Product weight		149 g
ELECTRIC	AL DATA	
Operating voltage		24V
Operatin	g voltage type	AC/DC
Operatin	g voltage frequency	50Hz
Operating voltage tolerance		+/- 10%
Rated operational voltage		24 VDC
Rated operational current		95 mA
Rated inrush current		500 mA
Protection class		Protection class 2
Pollution degree		3 In the connection area: 2
OPTICAL	DATA	
Light sou	rce	LED
Light colour		Green Red
Optical signal image		Permanent
Service life optical		50,000 h maximum
ACUSTIC	AL DATA	
Volume (max) at 1m distance		85,0 dB (A)

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

i




Completely pre-assembled Signal Towers / KOMPAKT 37 K37cl sr cable EM Pulse tone 24VAC/DC GN

Acoustic signal image	Pulse tone		
Audio frequency	2900 Hz		
Acoustic service life	5,000 h minimum		
APPROVAL DATA			
Conforms with CE	Yes		
WEEE	Yes		
Conforms with RED directive	No		
Conform with ATEX-directive	No		
Conforms with CCC	No		
Conforms with UL	cULus		
UL Type Rating	Type 12 Type 4X		
Conforms with FCC	No		
Conforms with IC	No		
EAC certificate available	Yes		
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)		
Conforms with AS-I	No		
ICAO Certification	No		
Conforms with GL	No		
Conforms with RoHS CN	No		
Conforms with VdS	No		

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

i

Completely pre-assembled Signal Towers / KOMPAKT 37 K37cl sr cable EM Pulse tone 24VAC/DC GN

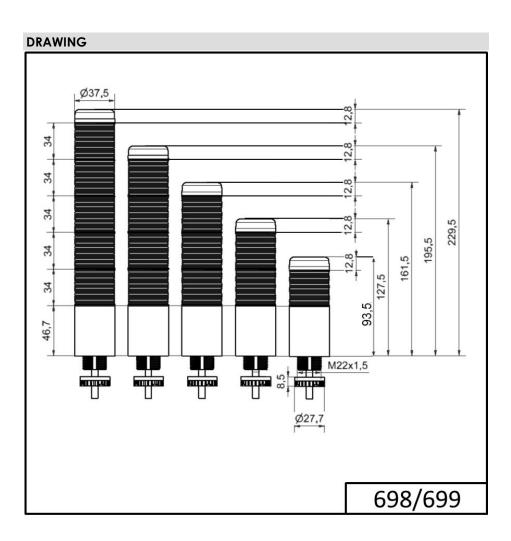

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.