

Completely pre-assembled Signal Towers / KOMPAKT 37

K37cl sr plug EM Pulse tone 24VAC/DC YE/



Part No.:	699.430.75		RoHS2		UK
Series:	Kompakt 37	7	ROH 52	c QL) us	CA

MECHANICAL DATA		
Height	141 mm	
Diameter	38 mm	
Materials	PC	
Dome colour	Clear	
Housing colour	Black	
Protection category	IP65	
Connection	M12 plug 5-pole	
Cable entry	Membrane grommet	
Cable entry minimum	d = 1 mm	
Cable entry maximum	d = 9 mm	
Tension relief	Pull-out protection	
Type of fixing	Built-in mounting	
Working temperature minimum	-20°C	
Working temperature maximum	+50°C	
Weight with packaging	116 g	
Product weight	76 g	

ELECTRICAL DATA		
Operating voltage	24V	
Operating voltage type	AC/DC	
Operating voltage frequency	50Hz	
Operating voltage tolerance	+/- 10%	
Rated operational voltage	24 VDC	
Rated operational current	85 mA	
Rated inrush current	500 mA	
Protection class	Protection class 2	
Pollution degree	3 In the connection area: 2	

OPTICAL DATA				
Light source	LED			
Light colour	Red Yellow			
Optical signal image	Permanent			
Service life optical	50,000 h maximum			

ACUSTICAL DATA		
Volume (max) at 1m distance	85,0 dB (A)	
Acoustic signal image	Pulse tone	
Audio frequency	2900 Hz	

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Completely pre-assembled Signal Towers / KOMPAKT 37

K37cl sr plug EM Pulse tone 24VAC/DC YE/


5,000 h minimum	
Yes	
Yes	
No	
No	
No	
cULus	
Type 12 Type 4X	
No	
No	
Yes	
Yes (WERMA (UK) Ltd.)	
No	

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Completely pre-assembled Signal Towers / KOMPAKT 37

K37cl sr plug EM Pulse tone 24VAC/DC YE/

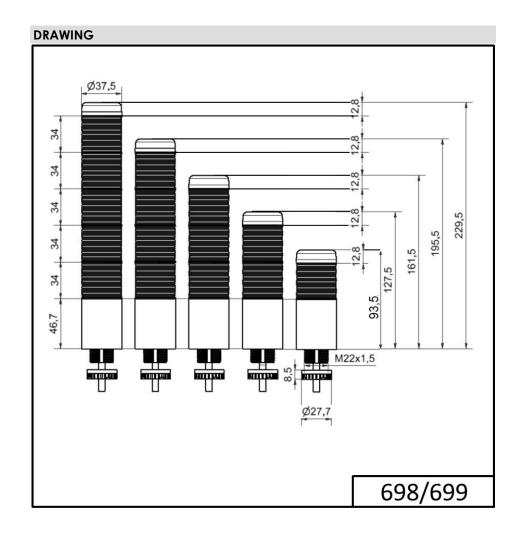

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.